



Specifications

Package	PWM5R - Molded Plastic	
Frequency Range (fo)	32.768kHz	
Frequency Tolerance	± 20ppm@25°C	
Frequency Stability	-0.035ppm/°C ² @ Parabolic Coef.	
Insulation Resistance	500M	
Turnover Temp.	+ 25°C ± 5°C	
Temp. Range	Operating (ToPR)	-20°C ~ 70°C (std.)
	Storage (Tstc)	-40°C ~ + 125°C (std.)
Drive Level (DL)	1.0μW	
Capacitance	Load (CL)	12.5pF Standard 6pF ~ 18pF opt
	Shunt (Co)	0.8pF
Equiv. Series Resist. (R₁)	65K	


Actual Size




RoHS Compliant
Lead Free



Dimensions (mm)

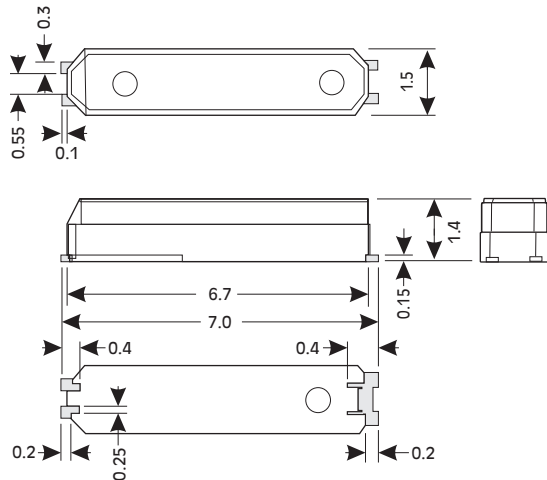

Recommended Pad

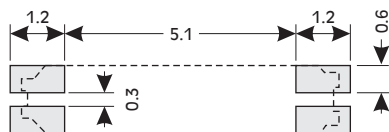

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. PLEASE CONTACT YOUR IMPACT SALES REPRESENTATIVE FOR CUSTOM SPECIFICATIONS, CURRENT INFORMATION, PRICING AND AVAILABILITY.